

7) The Declaration of Performance concerning a construction product covered by a harmonised standard:

(BDS) EN 13240:2006/A2:2006/AC:2006

The assessment acc. to System 3 has been carried out by Termotest Konsult Ltd, j.k. Borovo, bl.10 v.h.A'ap.9, j.k. „Borovo“, Sofia, Bulgaria, Notified Body 1999, which issued the Report on Initial Type Testing No. 0061/21.03.2011.

8) Declared performance


Harmonized technical specification	(BDS) EN 13240:2006/A2:2006/AC:2006
Essential characteristics	Performance
Reaction to fire	A1
Distance to combustible materials	Minimum distances, in mm rear = 750 sides = 700 ceiling = 1500 front = 800 floor = 800
Risk of burning fuel falling out	Pass
Emission of combustion products	CO (at 13% O ₂) [0.189 %]
Surface temperature	Pass
Electrical safety	Pass
Cleanability	Pass
Maximum operating pressure	-
Flue gas temperature at nominal heat output	T [357 °C]
Mechanical resistance (to carry a chimney/flue)	NPD
Thermal output	
Nominal heat output	8.5 kW
Room heating output	8.5 kW
Water heating output	-
Energy efficiency	[62 %] <input type="checkbox"/>

9) The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 8.

This Declaration of Performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Mr. Branislav Stojnic, technical director

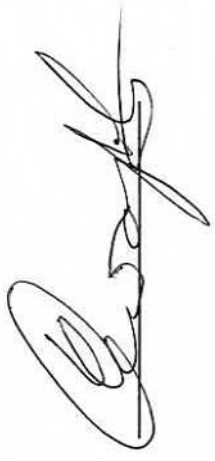

In Vajjevo, 11.07.2013.